

Housing for CitySync 30, 40 and CitySync 50 ANPR cameras



KEY FEATURES

- ▶ Made from 316 Stainless Steel 76cm high
- ▶ Protective housing for camera and PSU
- ▶ Short-range applications

The CAM-Bollard is optimised for short to mid-ranged ANPR for the following applications:

- ▶ Airport Access Points
- ▶ Car Park Entrances
- ▶ Barrier control systems

Cameras

The supported CitySync 30, 40 and 50 short range ANPR cameras offer a cost effective solution with the bollard for many applications where cameras could be vulnerable to attack. The bollard also blends into the car park environment and puts the camera in the ideal location for barrier control.

Easy maintenance

The bollard housing offers easy camera access through a large lockable panel. The stainless steel housing protects the internal camera against knocks which can cause misalignment.

Technical Information


The CitySync CS30, 40 and 50 utilise IR sensitive IP cameras. The CS30 sends a live video stream to an ANPR processor PC. The CS40 and 50 are intelligent cameras processing in the camera head transmitting compressed data packets to a server or third party back office.

CitySync Recognition Engine

The cameras are complemented by the CitySync recognition engine which is one of the fastest and most accurate in the world. The engine is supported full-time by our in-house development team.

PART NO. INFORMATION	DESCRIPTION
CAM-BOLLARD	Bollard housing for CS30/CS40/CS50

Recommended setup

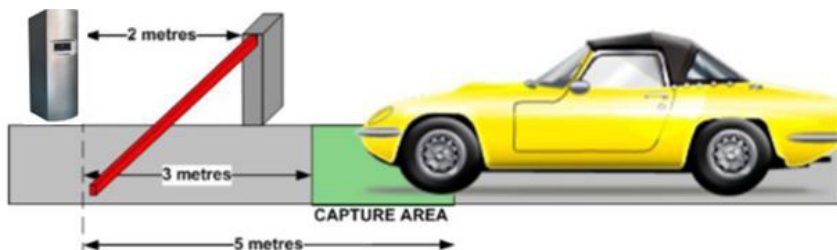

TECHNICAL INFORMATION

Input Power	24 V dc (PSU accepts 110-240VAC)
Power Consumption	<20 W with CS30, 40 or 50 camera
ANPR Range Options	3M to 10 meter range with CS30or CS50 short range
ANPR Camera	Can support CS30 and 40 non overview, or CS50 with integral overview
Housing	316 Stainless Steel
Illuminators	Dependant on Cameras installed see CS30, 40 & 50 data sheet
Environmental	Housing is shipped with a base for easy installation and ease of set up
Dimensions and Mass	760 mm x 260 mm x 315 mm (H x W x D)